



NATA LIGHTING CO.,LTD.
www.nata.cn
Email:info@nata.com
Tel:+86-750-3770000 Fax:+86-750-3771111
Address:380JinOu Road,GaoXin Zone,Jiang Men City,Guangdong,China

Nata

LumCAT: 1-0926-M
Luminaire: 99.02.73.171+92.76.853.00
Report No: 200908-B015
Test No: 200908-C015
LampCAT: CITIZEN CLU028 LES9.8
Lamp flux(lm): 1799.9
Number of Lamps: 1
Length(mm): 0
Phm Type: C

Voltage(V): 35.7100
Current(A): 0.3830
Power (W): 13.6760
PF: 0.0000
Ballast type: DC
Width(mm): 0
Height(mm): 0



Photometric Results

Lumens(lm): 1353.06
Efficiency(%): 75.17%
Lumens(lm)/Power(W): 98.94
Central intensity(cd): 10887.330
Maximum intensity(cd): 10887.330
Angle of maximum intensity: C=0.0 γ =0.0
Beam Angle(50%Imax): [C0/180]Total=16.4
 [C90/270]Total=16.4
Field angle(10%Imax): [C0/180]Total=37.6
 [C90/270]Total=37.6
Maximum s/h(1/2): C0_180=0.28 C90_270=0.28
Maximum s/h(1/4): C0_180=0.32 C90_270=0.32
Up flux rate of lamp(%): 0.00%
Down flux rate of lamp(%): 75.17%
Up flux rate of LUM(%): - -
Down flux rate of LUM(%): 100.00%
CIE Type : Direct lighting
Output flux ratio in π solid angle : 98.589%

Equipment: GMS1980
Temperature(°C): 25.0

Date: 2020/9/8
Humidity(%): 65.0%

Operator: NT07
Distance(m): 7.50

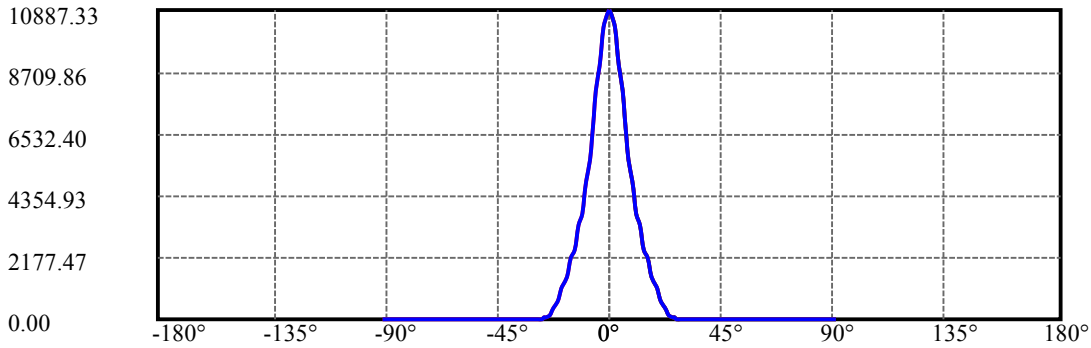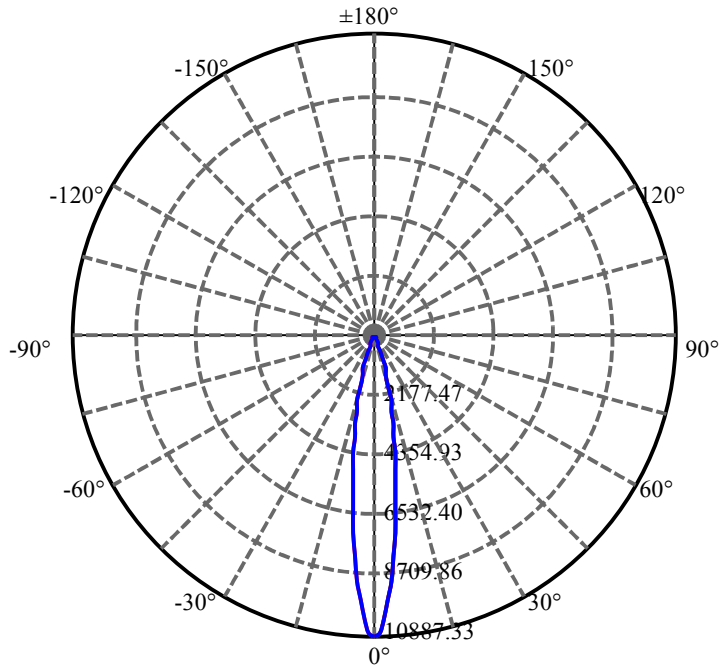

C0(Max): —————
C0/C180: —————
C90/C270: —————

Field angle(10%Imax):C0/180Left:18.8 Right:18.8
:C90/270Left:18.8 Right:18.8

Beam Angle(50%Imax):C0/180Left:8.2 Right:8.2
:C90/270Left:8.2 Right:8.2