



NATA LIGHTING CO.,LTD.  
www.nata.cn  
Email:info@nata.com  
Tel:+86-750-3770000 Fax:+86-750-3771111  
Address:380JinOu Road,GaoXin Zone,Jiang Men City,Guangdong,China

NT

Client:

LumCAT: 2-1563-M 铝反光罩

Luminaire: GH36D-B40 Hodel

Report No: 2024510-B003

Ballast type: AC

Test No: 2024510-C003

Voltage(V): 32.900

LampCAT: LUMINUS CXM-14-AC40

Current(A): 0.381

Lamp flux(lm): 2173.0

Power (W): 12.534

Number of Lamps: 1

PF: 0.000

Length(mm): 0

Width(mm): 0

Phm Type: C

Height(mm): 0

### Photometric Results

Lumens(lm): 1998.65, Efficiency(%): 91.98% , Luminous Efficacy(lm/W): 159.46

Central intensity(cd): 6465.186, Maximum intensity(cd): 6465.186

Angle of maximum intensity: C=0.0  $\gamma$ =0.0

Beam Angle(50%Imax): [C0/180]Total=25.6

[C90/270]Total=25.6

Field angle(10%Imax): [C0/180]Total=66.8

[C90/270]Total=66.8

Maximum s/h(1/2): C0\_180=0.43 C90\_270=0.43

Maximum s/h(1/4): C0\_180=0.43 C90\_270=0.43

Up flux rate of lamp(%): 0.00%

Down flux rate of lamp(%): 91.98%

Up flux rate of LUM(%): - -

Down flux rate of LUM(%): 100.00%

CIE Type : Direct lighting

Output flux ratio in  $\pi$  solid angle : 98.718%

Equipment: GMS1980  
Temperature(°C): 25.0

Date: 2024/5/10  
Humidity(%): 60.0%

Operator: NT07  
Distance(m): 7.65

## NT 2-1563-M 铝反光罩

Zonal flux distribution table

Appendix Page: 2 Total:19

$\gamma(^{\circ})$	Average I(cd)	Zonal F(lm)	Sum F(lm)	Eff Flux(%)	Eff Sum(%)
0.0	6465.185	0.000	0	0.00%	0.00%
1.0	6438.192	6.174	6.174	0.28%	0.31%
2.0	6367.745	18.380	24.554	0.85%	1.23%
3.0	6248.652	30.174	54.729	1.39%	2.74%
4.0	6080.254	41.269	95.997	1.90%	4.80%
5.0	5877.693	51.442	147.44	2.37%	7.38%
6.0	5632.118	60.487	207.927	2.78%	10.40%
7.0	5356.623	68.207	276.134	3.14%	13.82%
8.0	5032.774	74.355	350.489	3.42%	17.54%
9.0	4678.713	78.706	429.195	3.62%	21.47%
10.0	4307.753	81.324	510.519	3.74%	25.54%
11.0	3952.302	82.535	593.054	3.80%	29.67%
12.0	3555.812	82.074	675.129	3.78%	33.78%
13.0	3152.446	79.610	754.739	3.66%	37.76%
14.0	2786.388	76.017	830.755	3.50%	41.57%
15.0	2462.100	72.054	902.809	3.32%	45.17%
16.0	2149.444	67.572	970.381	3.11%	48.55%
17.0	1864.439	62.507	1032.888	2.88%	51.68%
18.0	1558.878	56.443	1089.331	2.60%	54.50%
19.0	1381.416	51.155	1140.486	2.35%	57.06%
20.0	1253.091	48.219	1188.705	2.22%	59.48%
21.0	1144.671	46.042	1234.747	2.12%	61.78%
22.0	1036.880	43.839	1278.586	2.02%	63.97%
23.0	964.290	41.990	1320.576	1.93%	66.07%
24.0	902.161	40.807	1361.383	1.88%	68.12%
25.0	856.426	39.986	1401.37	1.84%	70.12%
26.0	819.725	39.566	1440.935	1.82%	72.10%
27.0	793.133	39.459	1480.394	1.82%	74.07%
28.0	770.610	39.591	1519.985	1.82%	76.05%
29.0	748.708	39.750	1559.735	1.83%	78.04%
30.0	730.683	39.943	1599.678	1.84%	80.04%
31.0	712.431	40.160	1639.838	1.85%	82.05%
32.0	693.192	40.269	1680.107	1.85%	84.06%
33.0	663.440	39.967	1720.074	1.84%	86.06%
34.0	617.998	38.780	1758.854	1.78%	88.00%
35.0	564.281	36.717	1795.571	1.69%	89.84%
36.0	495.291	33.737	1829.308	1.55%	91.53%
37.0	427.946	30.111	1859.419	1.39%	93.03%

Equipment: GMS1980  
Temperature( $^{\circ}$ C): 25.0

Date: 2024/5/10  
Humidity(%): 60.0%

Operator: NT07  
Distance(m): 7.65

NT 2-1563-M 铝反光罩

Zonal flux distribution table

Appendix Page: 3 Total:19

$\gamma(^{\circ})$	Average I(cd)	Zonal F(lm)	Sum F(lm)	Eff Flux(%)	Eff Sum(%)
38.0	353.147	26.072	1885.491	1.20%	94.34%
39.0	284.178	21.754	1907.244	1.00%	95.43%
40.0	235.524	18.125	1925.37	0.83%	96.33%
41.0	182.078	14.871	1940.24	0.68%	97.08%
42.0	90.359	9.898	1950.139	0.46%	97.57%
43.0	49.898	5.196	1955.334	0.24%	97.83%
44.0	27.981	2.939	1958.273	0.14%	97.98%
45.0	18.596	1.790	1960.063	0.08%	98.07%
46.0	14.901	1.310	1961.373	0.06%	98.13%
47.0	12.078	1.073	1962.446	0.05%	98.19%
48.0	10.790	0.924	1963.371	0.04%	98.23%
49.0	10.007	0.854	1964.225	0.04%	98.28%
50.0	9.517	0.814	1965.039	0.04%	98.32%
51.0	9.298	0.796	1965.835	0.04%	98.36%
52.0	9.166	0.792	1966.627	0.04%	98.40%
53.0	9.056	0.793	1967.42	0.04%	98.44%
54.0	8.954	0.794	1968.214	0.04%	98.48%
55.0	8.866	0.795	1969.009	0.04%	98.52%
56.0	8.793	0.798	1969.807	0.04%	98.56%
57.0	8.705	0.800	1970.607	0.04%	98.60%
58.0	8.639	0.802	1971.409	0.04%	98.64%
59.0	8.588	0.805	1972.215	0.04%	98.68%
60.0	8.515	0.808	1973.023	0.04%	98.72%
61.0	8.464	0.810	1973.833	0.04%	98.76%
62.0	8.420	0.814	1974.647	0.04%	98.80%
63.0	8.383	0.817	1975.464	0.04%	98.84%
64.0	8.339	0.821	1976.284	0.04%	98.88%
65.0	8.332	0.825	1977.109	0.04%	98.92%
66.0	8.281	0.829	1977.938	0.04%	98.96%
67.0	8.266	0.832	1978.77	0.04%	99.01%
68.0	8.237	0.836	1979.606	0.04%	99.05%
69.0	8.215	0.839	1980.446	0.04%	99.09%
70.0	8.200	0.843	1981.289	0.04%	99.13%
71.0	8.171	0.846	1982.135	0.04%	99.17%
72.0	8.149	0.849	1982.984	0.04%	99.22%
73.0	8.142	0.852	1983.835	0.04%	99.26%
74.0	8.127	0.855	1984.691	0.04%	99.30%
75.0	8.091	0.857	1985.548	0.04%	99.34%

## NT 2-1563-M 铝反光罩

## Zonal flux distribution table

Appendix Page: 4 Total:19



$\gamma(^{\circ})$	Average I(cd)	Zonal F(lm)	Sum F(lm)	Eff Flux(%)	Eff Sum(%)
76.0	8.105	0.860	1986.407	0.04%	99.39%
77.0	8.098	0.864	1987.271	0.04%	99.43%
78.0	8.076	0.866	1988.137	0.04%	99.47%
79.0	8.083	0.868	1989.005	0.04%	99.52%
80.0	8.069	0.871	1989.876	0.04%	99.56%
81.0	8.076	0.873	1990.749	0.04%	99.60%
82.0	8.054	0.875	1991.624	0.04%	99.65%
83.0	8.040	0.875	1992.499	0.04%	99.69%
84.0	8.054	0.877	1993.376	0.04%	99.74%
85.0	8.054	0.879	1994.255	0.04%	99.78%
86.0	8.032	0.879	1995.134	0.04%	99.82%
87.0	8.032	0.879	1996.013	0.04%	99.87%
88.0	8.025	0.880	1996.893	0.04%	99.91%
89.0	8.032	0.880	1997.773	0.04%	99.96%
90.0	8.025	0.880	1998.653	0.04%	100.00%

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-30	1599.68	73.62%	80.04%
0-40	1925.37	88.60%	96.33%
0-60	1973.02	90.80%	98.72%
0-90	1997.77	91.94%	99.96%
0-120	1997.77	91.94%	99.96%
0-180	1998.65	91.98%	100.00%
60-90	24.75	1.14%	1.24%
90-120	0.00	0.00%	0.00%
90-130	0.00	0.00%	0.00%
90-150	0.00	0.00%	0.00%
90-180	0.00	0.00%	0.00%
0-29.98	1598.92	73.58%	80.00%

ZONAL LUMEN SUMMARY

0-10	510.52
10-20	678.19
20-30	410.97
30-40	325.69
40-50	39.67
50-60	7.98
60-70	8.27
70-80	8.59
80-90	7.90
90-100	0.00
100-110	0.00
110-120	0.00
120-130	0.00
130-140	0.00
140-150	0.00
150-160	0.00
160-170	0.00
170-180	0.00

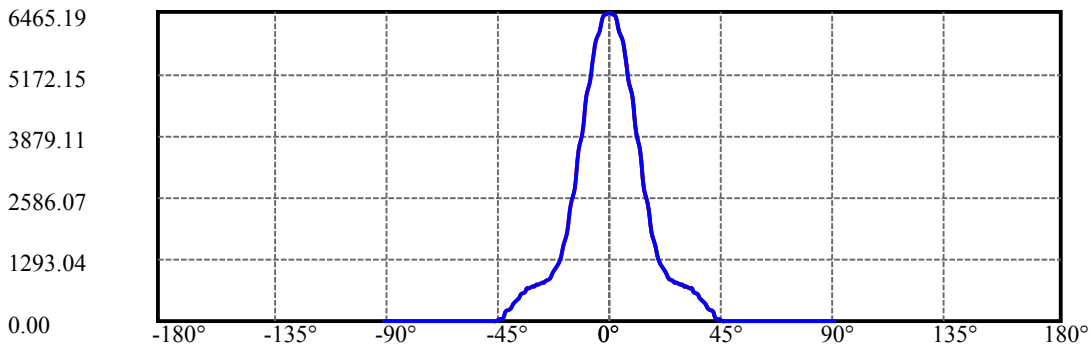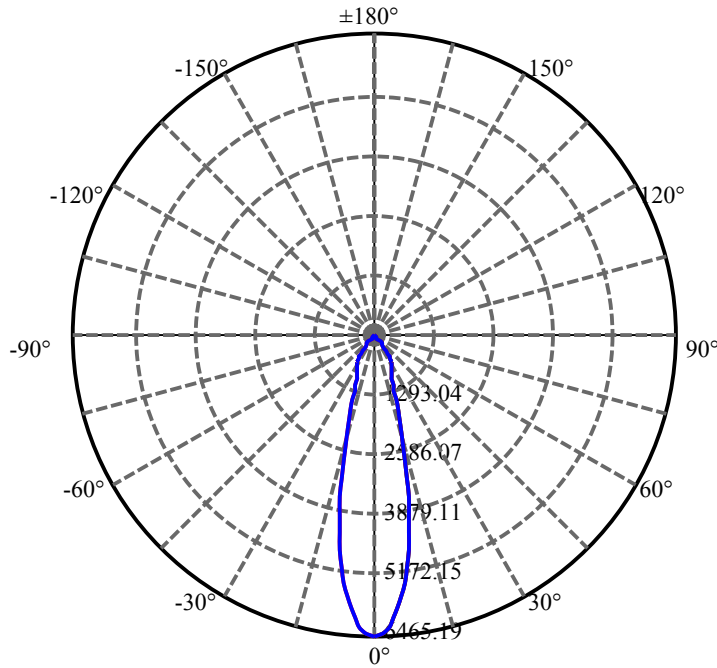

C0(Max): ———

C0/C180: ———


C90/C270: ———


Field angle(10%Imax):C0/180Left:33.4 Right:33.4

:C90/270Left:33.4 Right:33.4

Beam Angle(50%Imax):C0/180Left:12.8 Right:12.8


:C90/270Left:12.8 Right:12.8

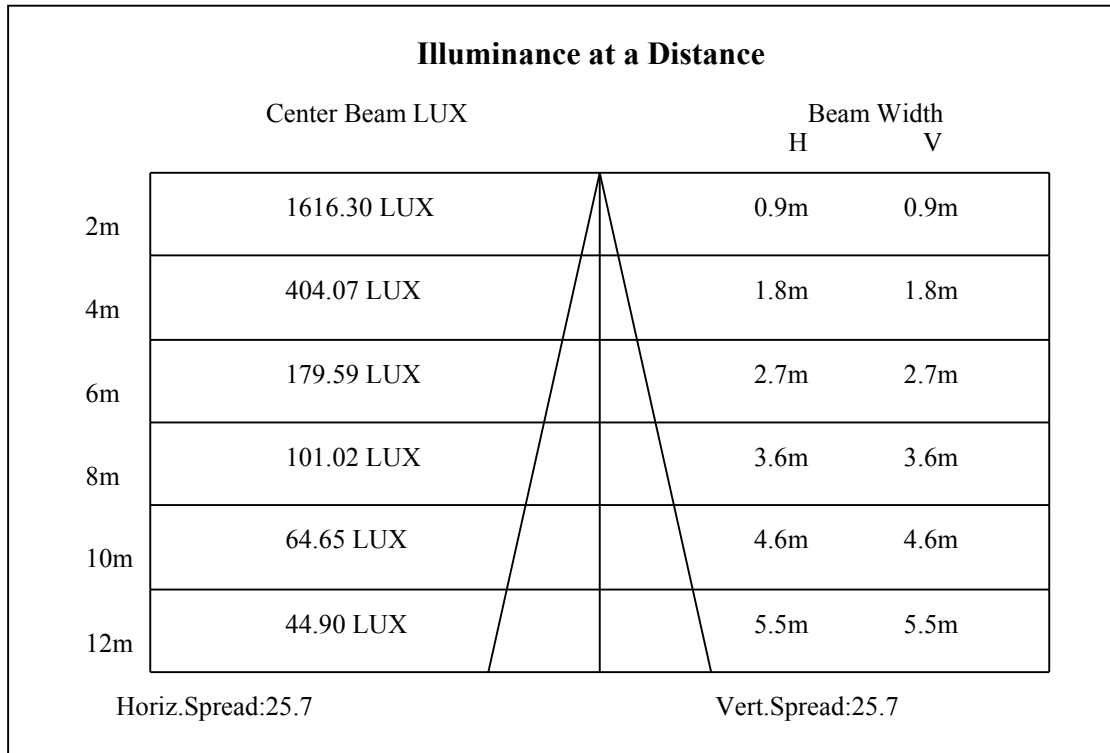

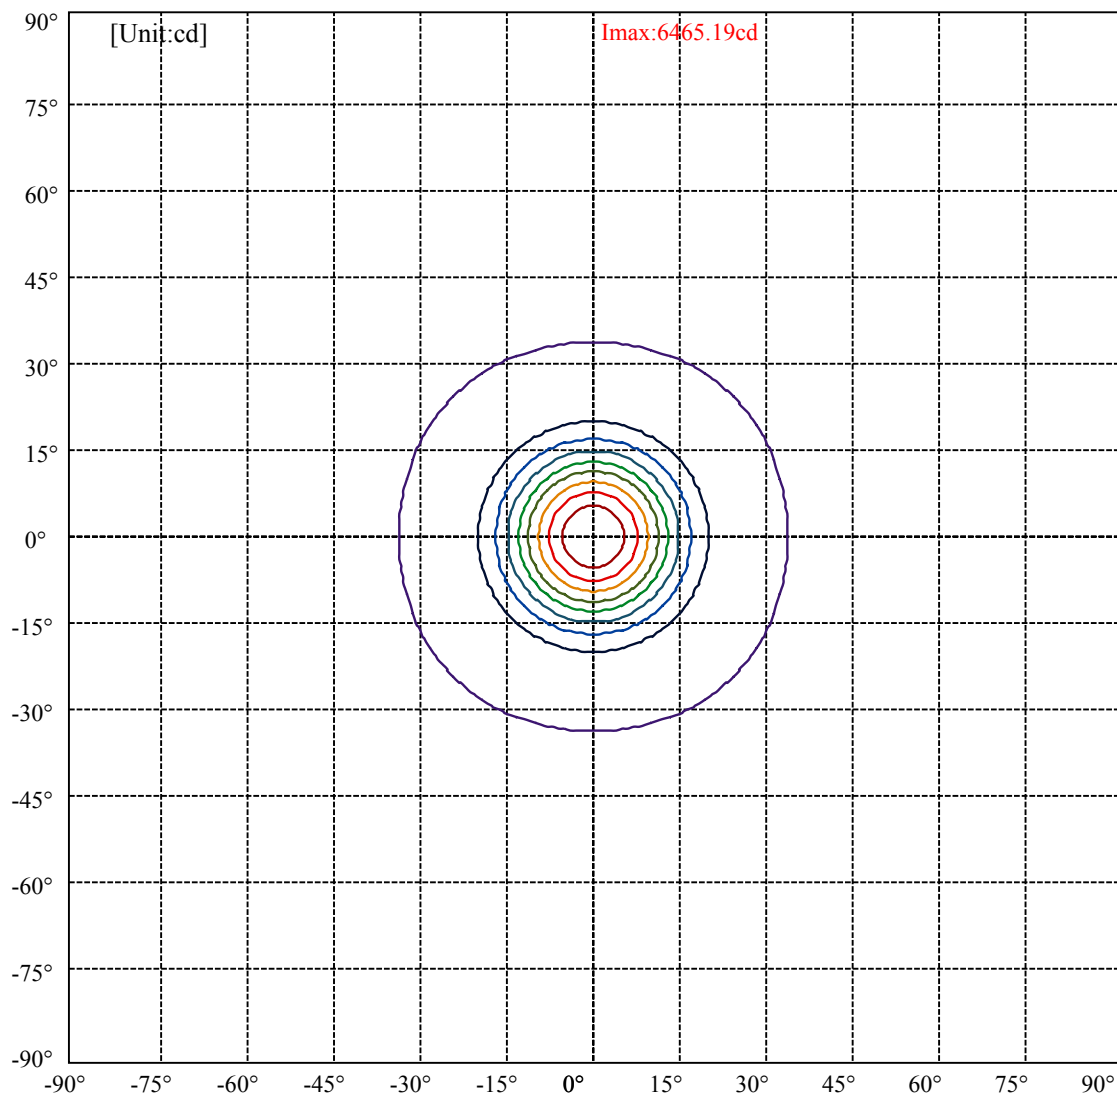

(10%Imax) 646.519	—
(20%Imax) 1293.04	—
(30%Imax) 1939.56	—
(40%Imax) 2586.07	—
(50%Imax) 3232.59	—
(60%Imax) 3879.11	—
(70%Imax) 4525.63	—
(80%Imax) 5172.15	—
(90%Imax) 5818.67	—




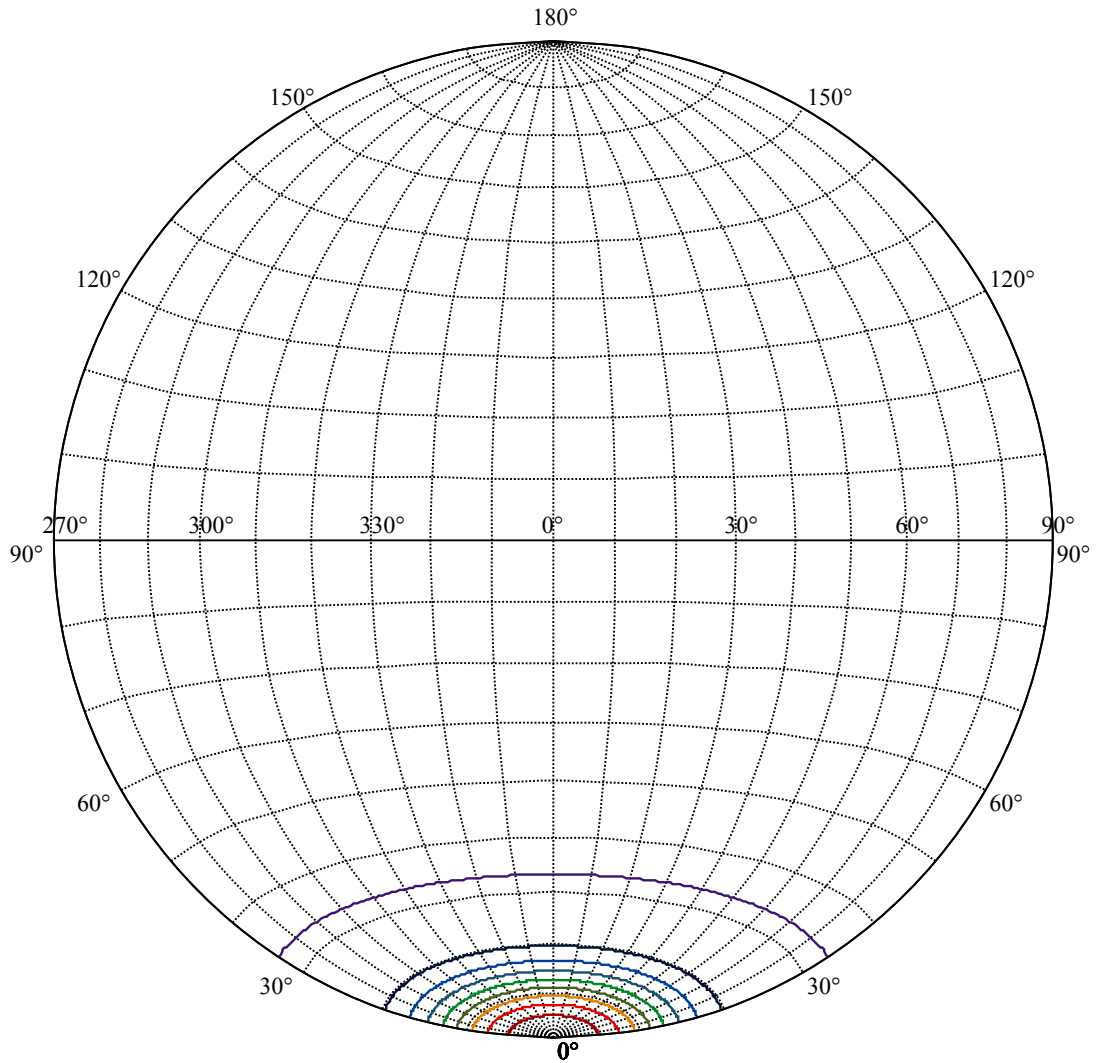

**I<sub>max</sub>:6465.19**

(10%I <sub>max</sub> )	646.519	—
(20%I <sub>max</sub> )	1293.04	—
(30%I <sub>max</sub> )	1939.56	—
(40%I <sub>max</sub> )	2586.07	—
(50%I <sub>max</sub> )	3232.59	—
(60%I <sub>max</sub> )	3879.11	—
(70%I <sub>max</sub> )	4525.63	—
(80%I <sub>max</sub> )	5172.15	—
(90%I <sub>max</sub> )	5818.67	—



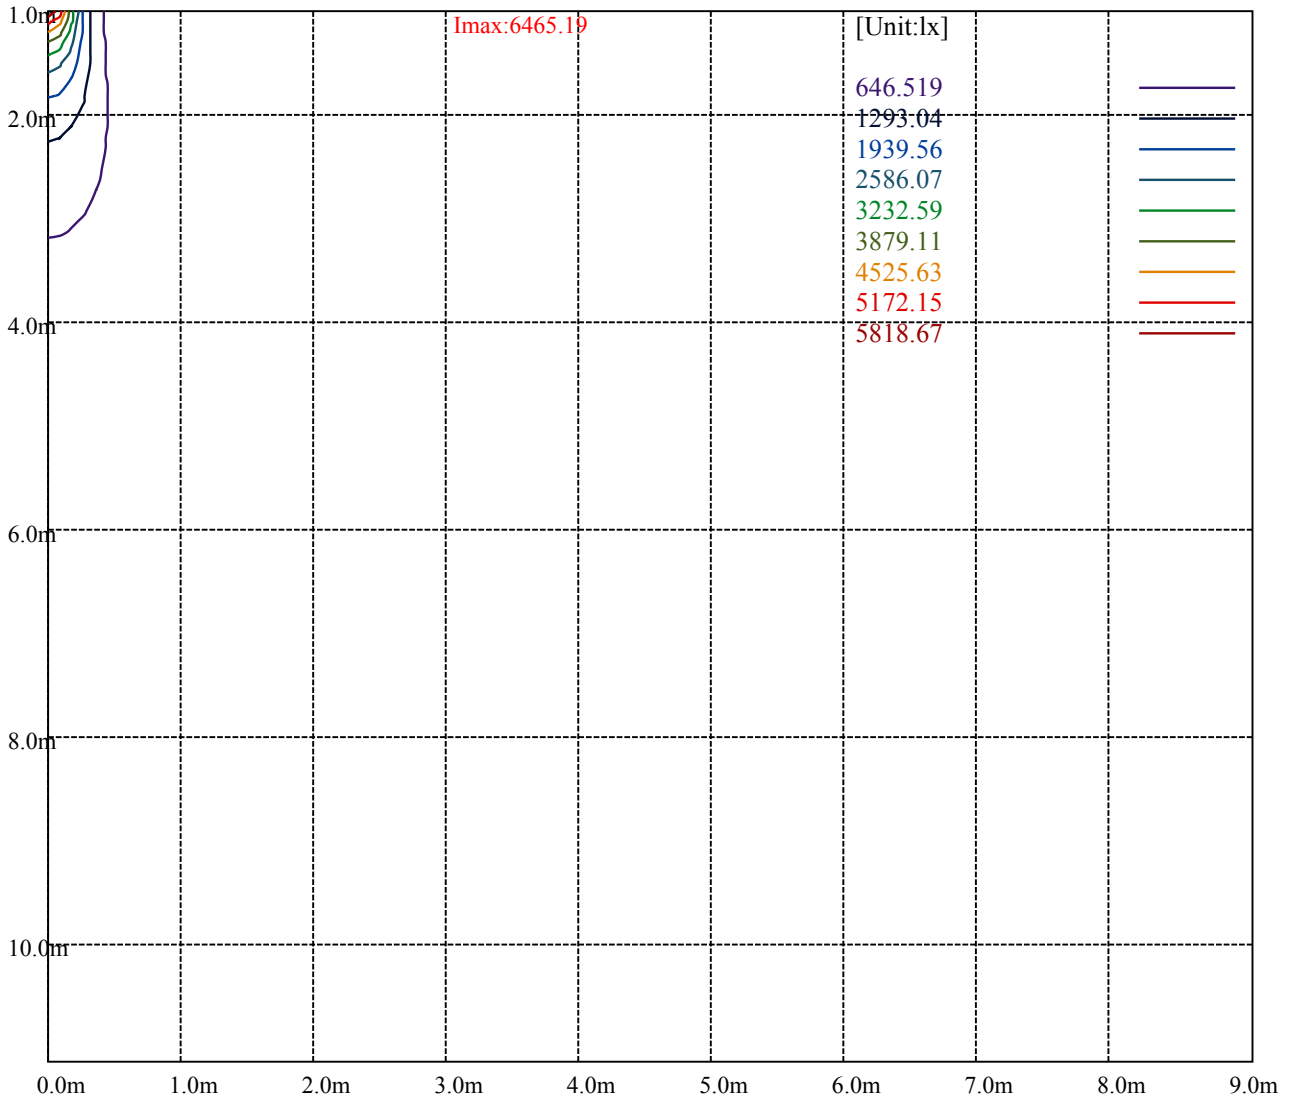

NT 2-1563-M 铝反光罩

Luminance Limiting Curve(no luminous side)

Luminance Table


$\gamma$	45	50	55	60	65	70	75	80	85
C0	16110	12707	11994	12838	14615	16996	20243	28497	54367
C45	16110	12707	11994	12838	14615	16996	20243	28497	54367
C90	16110	12707	11994	12838	14615	16996	20243	28497	54367


L(Hor)(65)	L(Ver)(65)	L45(65)	L(Hor)(75)	L(Ver)(75)	L45(75)	L(Hor)(85)	L(Ver)(85)	L45(85)
14615	14615	14615	20243	20243	20243	54367	54367	54367

Glare Table

Glare	Quality	Service Values Illuminance(lx)							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300
		a	b	c	d	e	f	g	h

Luminance Limiting Curve

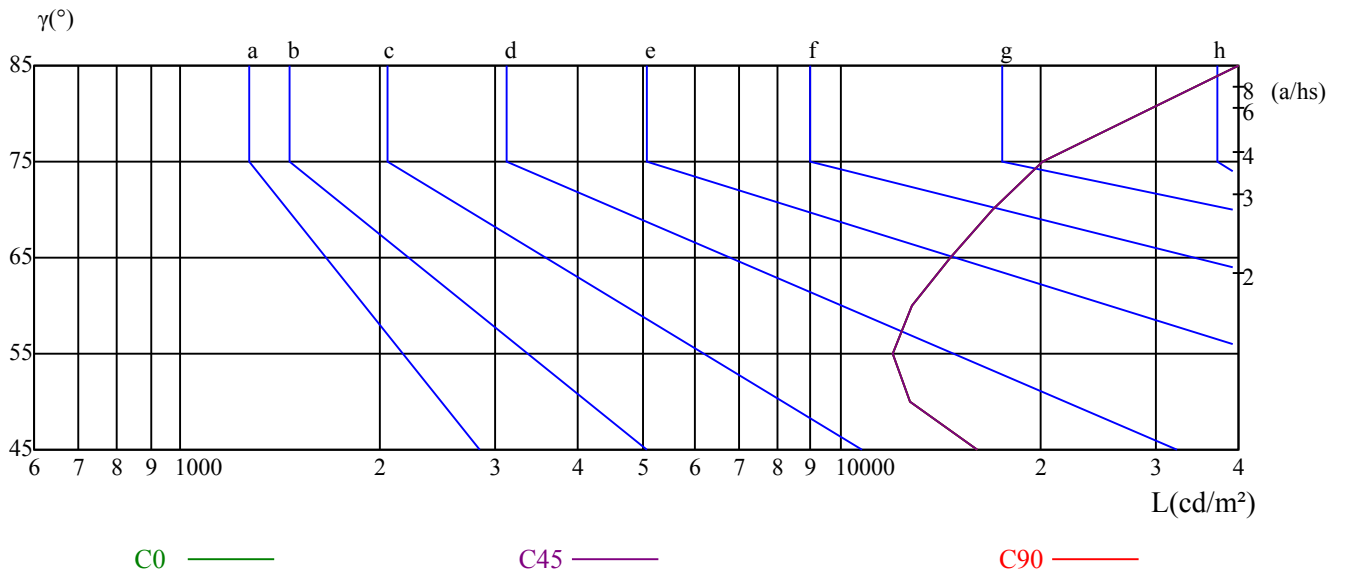

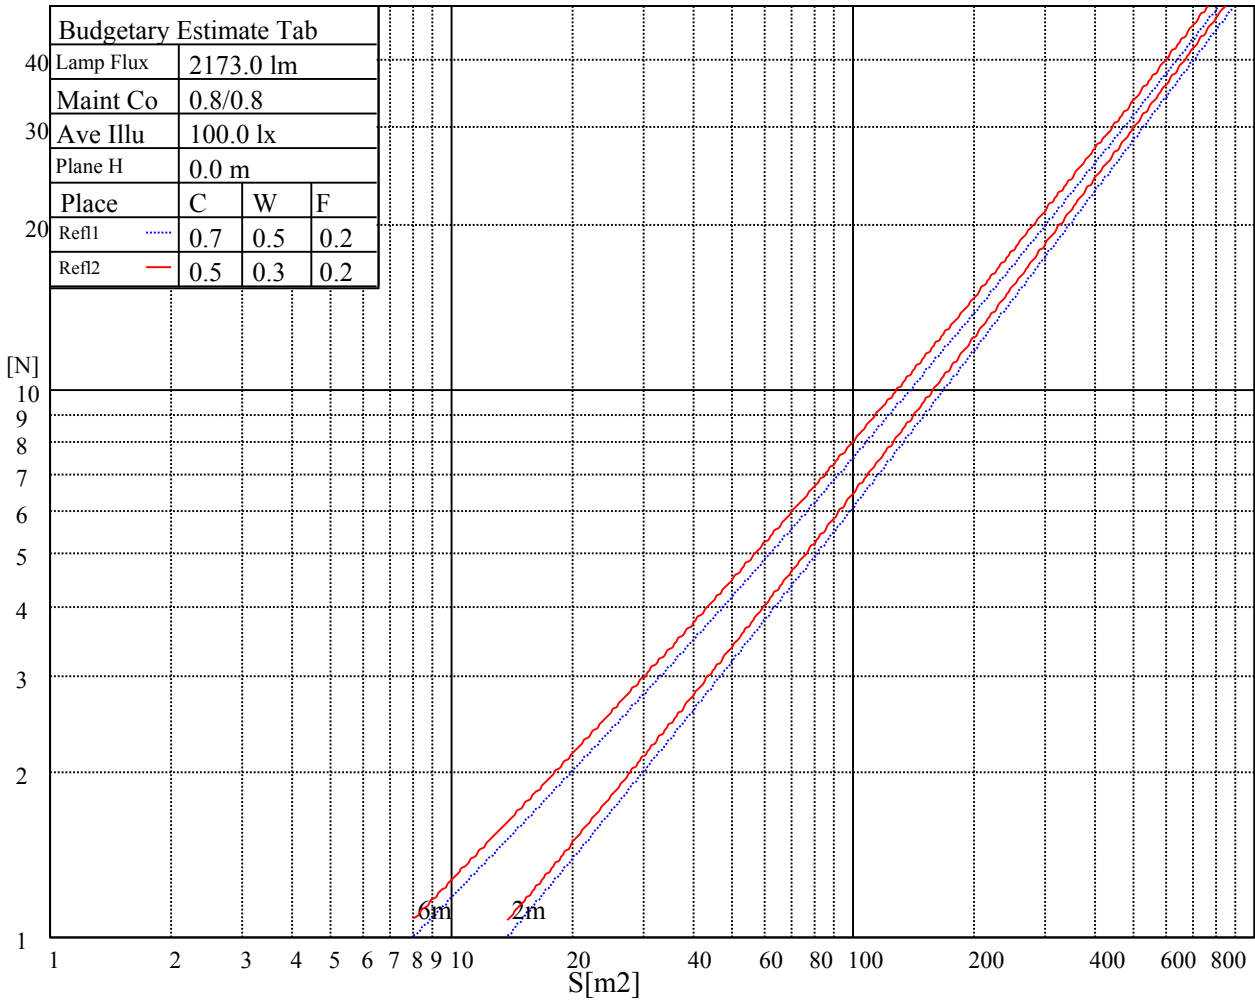



NT 2-1563-M 铝反光罩

Utilization factor table for indoor luminaire

Appendix Page: 14 Total:19

RHOCC	80			70			50			30			10			0
RHOW	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	COEFFICIENTS OF UTILIZATION RHOF=20 CU															
0	1.09	1.09	1.09	1.07	1.07	1.07	1.02	1.02	1.02	0.98	0.98	0.98	0.94	0.94	0.94	0.92
1	1.03	1.01	0.99	1.01	0.99	0.97	0.97	0.95	0.94	0.94	0.92	0.91	0.90	0.90	0.89	0.87
2	0.97	0.93	0.91	0.95	0.92	0.90	0.92	0.90	0.88	0.89	0.87	0.86	0.87	0.85	0.84	0.83
3	0.91	0.87	0.84	0.90	0.86	0.84	0.88	0.85	0.82	0.86	0.83	0.81	0.84	0.82	0.80	0.78
4	0.87	0.82	0.79	0.86	0.82	0.78	0.84	0.80	0.78	0.82	0.79	0.77	0.80	0.78	0.76	0.75
5	0.82	0.78	0.74	0.82	0.77	0.74	0.80	0.76	0.74	0.79	0.75	0.73	0.77	0.74	0.72	0.71
6	0.79	0.74	0.71	0.78	0.74	0.70	0.77	0.73	0.70	0.75	0.72	0.69	0.74	0.71	0.69	0.68
7	0.75	0.70	0.67	0.75	0.70	0.67	0.73	0.70	0.67	0.72	0.69	0.66	0.72	0.68	0.66	0.65
8	0.72	0.67	0.64	0.72	0.67	0.64	0.71	0.67	0.64	0.70	0.66	0.64	0.69	0.66	0.63	0.62
9	0.69	0.65	0.61	0.69	0.64	0.61	0.68	0.64	0.61	0.67	0.64	0.61	0.66	0.63	0.61	0.60
10	0.66	0.62	0.59	0.66	0.62	0.59	0.65	0.61	0.59	0.65	0.61	0.59	0.64	0.61	0.58	0.57

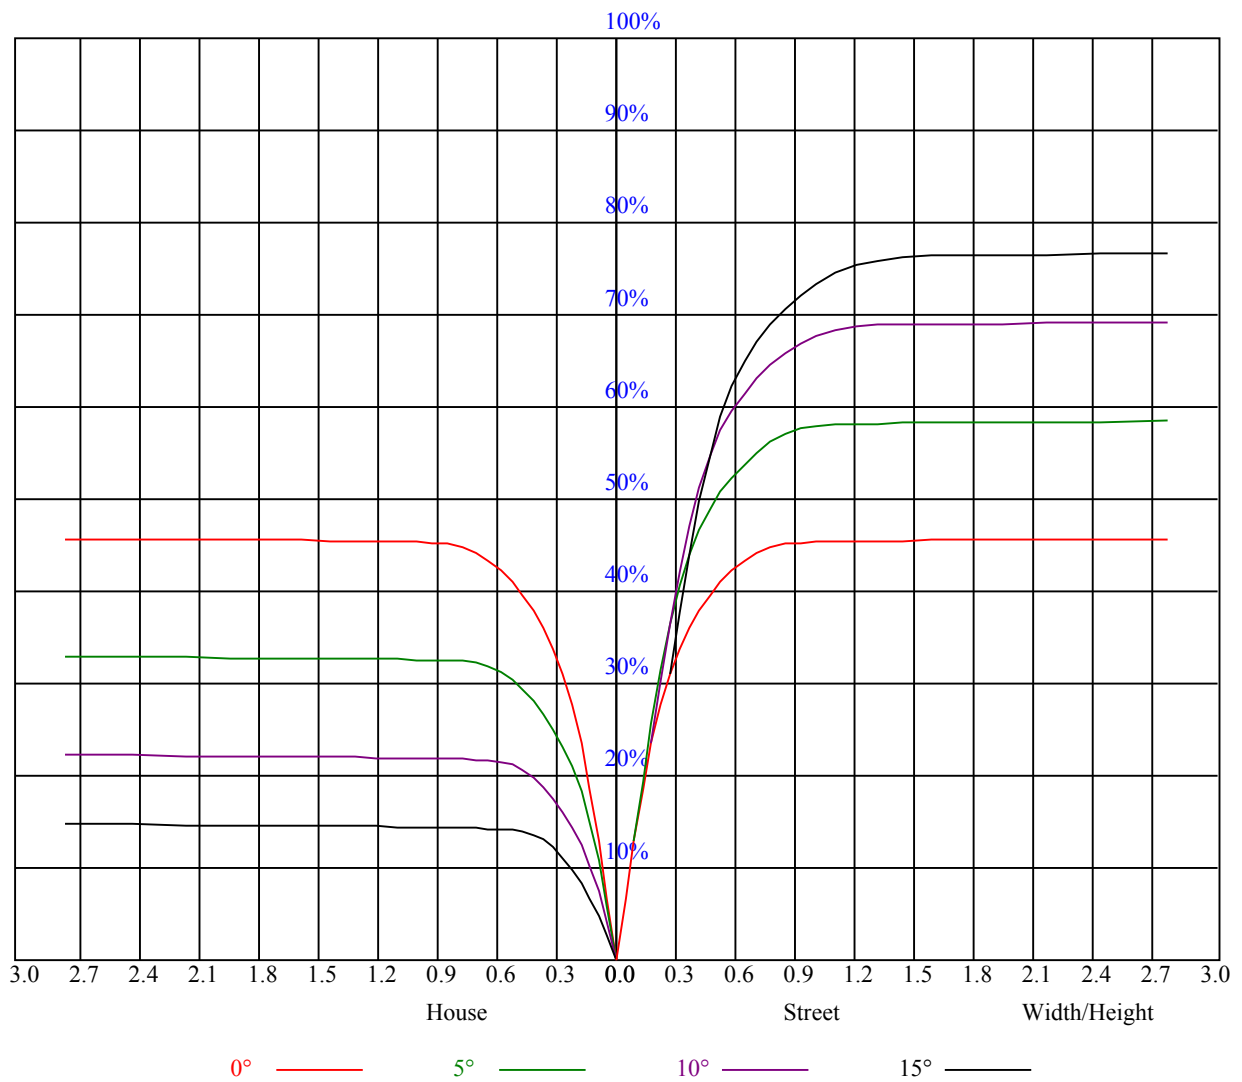

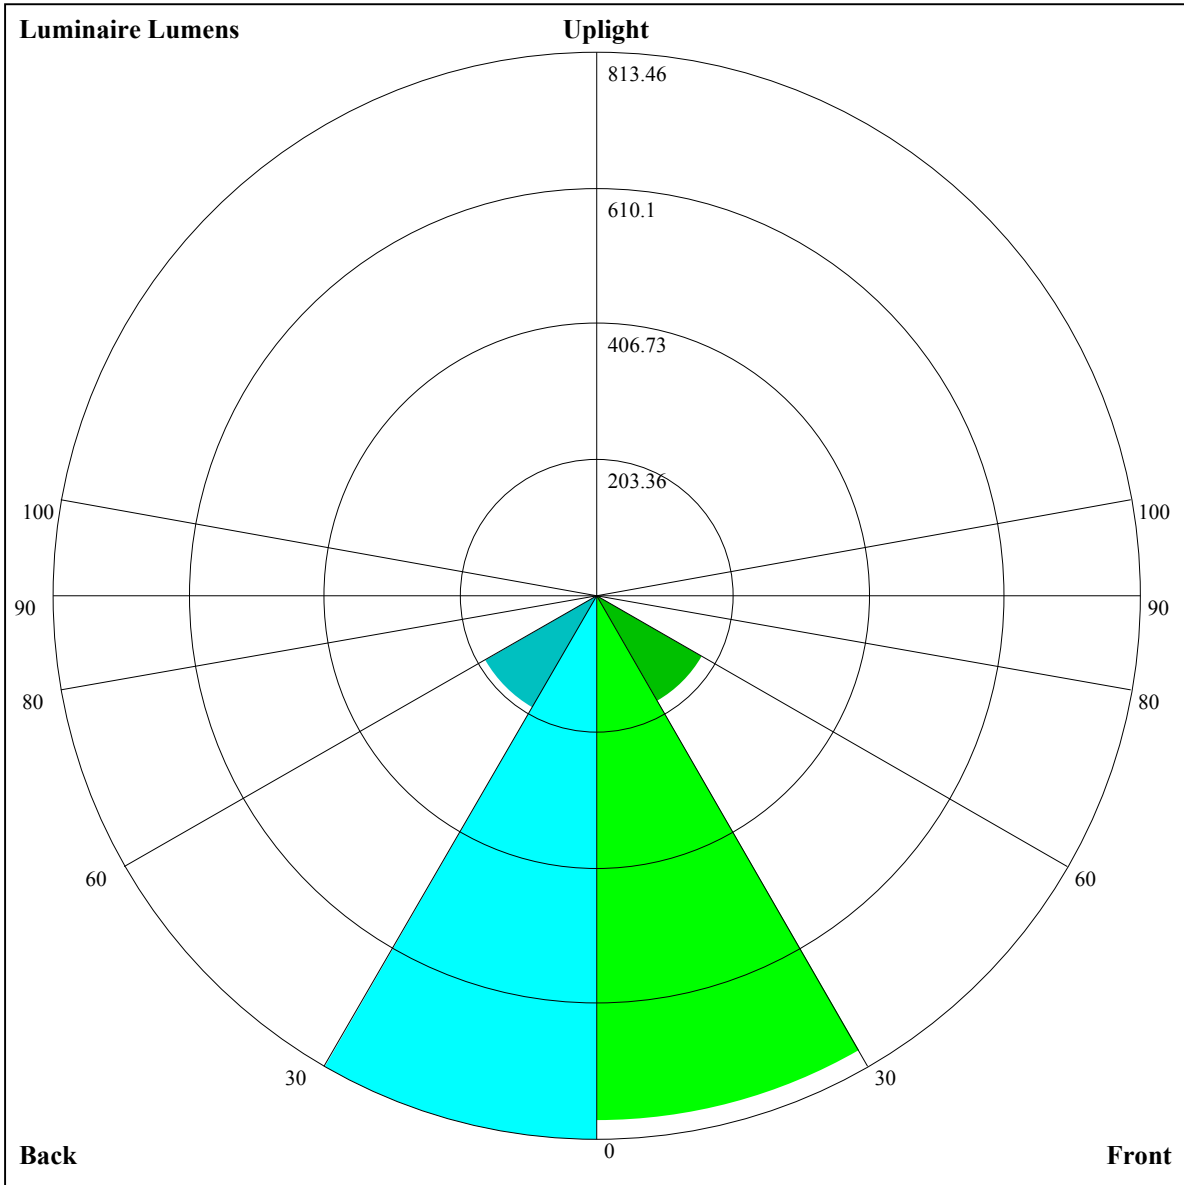

Luminaire Lumens:

FL=787.08,FM=181.62,FH=8.43,FVH=4.39

BL=813.46,BM=193.15,BH=8.43,BVH=4.39

UL=0,UH=0

BUG Rating:B2-U0-G0



NT 2-1563-M 铝反光罩

Intensity data(cd)

C/γ(°)	0.0	1.0	2.0	3.0	4.0	5.0	6.0	7.0	8.0
0.0	6450.41	6382.52	6276.01	6119.17	5898.54	5666.79	5412.80	5121.95	4722.82
45.0	6458.02	6477.91	6463.87	6389.55	6278.35	6116.83	5884.50	5655.67	5395.25
90.0	6493.72	6486.11	6426.41	6317.56	6167.16	5982.23	5712.44	5461.38	5169.35
135.0	6458.60	6478.50	6471.48	6400.66	6291.23	6134.39	5949.46	5735.85	5421.00
180.0	6450.41	6470.31	6443.39	6354.43	6233.88	6077.62	5840.02	5596.57	5321.51
225.0	6458.02	6363.80	6240.90	6079.38	5895.03	5599.49	5324.44	5007.83	4679.52
270.0	6493.72	6453.33	6370.23	6240.31	6024.95	5820.12	5579.01	5300.44	4912.44
315.0	6458.60	6393.06	6249.68	6088.15	5852.89	5624.07	5354.28	4973.30	4640.31
360.0	6450.41	6382.52	6276.01	6119.17	5898.54	5666.79	5412.80	5121.95	4722.82

C/γ(°)	9.0	10.0	11.0	12.0	13.0	14.0	15.0	16.0	17.0
0.0	4376.37	4028.75	3663.57	3201.24	2853.03	2452.15	2158.37	1887.99	1607.09
45.0	5017.78	4702.34	4360.57	4000.07	3554.72	3189.53	2840.74	2514.77	2142.57
90.0	4853.33	4422.60	4069.71	3707.46	3253.32	2908.04	2577.97	2202.26	1934.81
135.0	5128.39	4732.19	4388.08	4034.60	3579.29	3215.87	2861.81	2455.08	2160.12
180.0	4932.33	4605.19	4255.23	3885.95	3409.58	3061.96	2740.67	2415.87	2077.02
225.0	4246.45	3885.37	3517.85	3073.66	2738.91	2356.17	2077.02	1824.20	1562.02
270.0	4580.61	4238.84	3880.69	3419.53	3049.67	2716.67	2335.69	2048.93	1808.99
315.0	4294.44	3846.74	3482.73	3123.99	2781.05	2390.70	2104.53	1846.44	1622.89
360.0	4376.37	4028.75	3663.57	3201.24	2853.03	2452.15	2158.37	1887.99	1607.09

C/γ(°)	18.0	19.0	20.0	21.0	22.0	23.0	24.0	25.0	26.0
0.0	1307.45	1145.40	1145.40	1022.62	948.18	890.13	845.36	804.39	778.93
45.0	1881.56	1653.90	1420.40	1270.00	1120.18	1027.13	952.80	883.16	842.20
90.0	1696.04	1330.27	1164.13	1164.13	1036.96	960.12	900.13	854.72	812.58
135.0	1895.60	1668.53	1435.62	1284.63	1162.32	1065.17	969.19	911.84	858.00
180.0	1825.38	1559.10	1388.80	1241.91	1110.82	1026.54	959.24	904.82	857.41
225.0	1160.03	1160.03	1134.52	1043.57	957.19	904.11	862.74	832.31	800.30
270.0	1549.15	1378.26	1207.38	1096.77	1015.42	951.05	887.84	850.39	822.88
315.0	1155.82	1155.82	1128.49	1033.74	943.97	890.07	839.97	809.78	785.49
360.0	1307.45	1145.40	1145.40	1022.62	948.18	890.13	845.36	804.39	778.93

C/γ(°)	27.0	28.0	29.0	30.0	31.0	32.0	33.0	34.0	35.0
0.0	756.05	738.26	717.19	702.91	685.06	666.69	633.04	570.59	509.15
45.0	811.18	784.85	757.34	738.03	721.64	705.25	687.70	667.80	630.35
90.0	786.07	763.72	744.99	727.32	707.13	692.56	669.03	627.65	574.63
135.0	825.81	798.89	771.97	753.24	735.69	720.47	702.33	680.09	638.54
180.0	828.15	804.16	782.50	756.75	740.95	725.15	705.84	675.41	636.78
225.0	779.64	760.38	737.38	722.64	703.32	676.05	630.05	561.70	499.08
270.0	798.31	773.14	753.83	736.27	716.96	698.82	663.70	599.91	541.39
315.0	759.86	741.48	724.45	708.30	688.69	660.54	615.83	560.82	484.33
360.0	756.05	738.26	717.19	702.91	685.06	666.69	633.04	570.59	509.15

C/γ(°)	36.0	37.0	38.0	39.0	40.0	41.0	42.0	43.0	44.0
0.0	442.84	374.31	284.95	215.66	152.16	96.68	44.65	23.70	18.79
45.0	562.46	502.18	437.22	351.19	299.11	299.11	137.35	84.21	44.30
90.0	500.07	437.81	370.51	286.29	223.44	163.51	107.51	51.73	25.52
135.0	584.11	504.52	435.47	364.07	310.81	310.81	145.55	92.29	41.84
180.0	560.12	496.33	426.10	333.05	297.94	297.94	128.63	68.59	35.52
225.0	433.30	363.66	279.33	214.19	152.57	96.80	53.14	23.82	19.20
270.0	461.80	395.09	326.61	309.64	309.64	119.97	70.52	34.82	21.59
315.0	417.62	349.67	264.99	199.33	138.52	71.81	35.52	20.01	17.09
360.0	442.84	374.31	284.95	215.66	152.16	96.68	44.65	23.70	18.79

NT 2-1563-M 铝反光罩

Intensity data(cd)

C/γ(°)	45.0	46.0	47.0	48.0	49.0	50.0	51.0	52.0	53.0
0.0	15.39	13.52	11.00	9.71	9.54	9.36	9.19	9.13	9.01
45.0	23.82	18.73	14.40	12.35	11.06	10.30	9.66	9.48	9.31
90.0	19.61	15.10	11.82	10.65	9.77	9.54	9.42	9.25	9.13
135.0	23.53	18.02	13.99	12.35	10.65	9.77	9.48	9.31	9.19
180.0	22.36	17.09	13.23	11.82	10.53	9.42	9.25	9.13	9.01
225.0	13.75	11.88	10.48	9.48	9.36	9.25	9.13	9.01	8.95
270.0	16.80	13.17	11.88	10.48	9.83	9.31	9.19	9.07	8.95
315.0	13.52	11.70	9.83	9.48	9.31	9.19	9.07	8.95	8.90
360.0	15.39	13.52	11.00	9.71	9.54	9.36	9.19	9.13	9.01
C/γ(°)	54.0	55.0	56.0	57.0	58.0	59.0	60.0	61.0	62.0
0.0	8.90	8.84	8.72	8.66	8.54	8.54	8.49	8.43	8.43
45.0	9.19	9.07	9.01	8.84	8.78	8.72	8.60	8.54	8.49
90.0	9.01	8.95	8.84	8.78	8.66	8.66	8.54	8.49	8.43
135.0	9.07	8.95	8.90	8.84	8.72	8.66	8.60	8.54	8.43
180.0	8.95	8.84	8.78	8.72	8.66	8.60	8.49	8.49	8.43
225.0	8.84	8.78	8.72	8.60	8.60	8.49	8.49	8.43	8.37
270.0	8.90	8.78	8.72	8.66	8.60	8.54	8.49	8.43	8.43
315.0	8.78	8.72	8.66	8.54	8.54	8.49	8.43	8.37	8.37
360.0	8.90	8.84	8.72	8.66	8.54	8.54	8.49	8.43	8.43
C/γ(°)	63.0	64.0	65.0	66.0	67.0	68.0	69.0	70.0	71.0
0.0	8.37	8.31	8.31	8.25	8.25	8.19	8.19	8.19	8.13
45.0	8.49	8.43	8.43	8.37	8.31	8.25	8.25	8.19	8.19
90.0	8.37	8.37	8.31	8.31	8.25	8.25	8.25	8.19	8.19
135.0	8.43	8.37	8.37	8.31	8.31	8.25	8.25	8.25	8.19
180.0	8.37	8.31	8.31	8.25	8.25	8.25	8.19	8.19	8.19
225.0	8.37	8.31	8.31	8.25	8.25	8.25	8.19	8.19	8.13
270.0	8.37	8.31	8.31	8.25	8.25	8.25	8.19	8.19	8.19
315.0	8.31	8.31	8.31	8.25	8.25	8.19	8.19	8.19	8.13
360.0	8.37	8.31	8.31	8.25	8.25	8.19	8.19	8.19	8.13
C/γ(°)	72.0	73.0	74.0	75.0	76.0	77.0	78.0	79.0	80.0
0.0	8.13	8.13	8.08	8.08	8.08	8.08	8.08	8.08	8.08
45.0	8.19	8.13	8.13	8.13	8.13	8.13	8.08	8.08	8.08
90.0	8.13	8.13	8.13	8.08	8.13	8.13	8.08	8.08	8.08
135.0	8.19	8.19	8.19	8.13	8.13	8.13	8.13	8.13	8.08
180.0	8.13	8.13	8.13	8.08	8.08	8.08	8.08	8.08	8.08
225.0	8.13	8.13	8.13	8.08	8.08	8.08	8.02	8.08	8.02
270.0	8.13	8.13	8.08	8.08	8.13	8.08	8.08	8.08	8.08
315.0	8.13	8.13	8.13	8.08	8.08	8.08	8.08	8.08	8.08
360.0	8.13	8.13	8.08	8.08	8.08	8.08	8.08	8.08	8.08
C/γ(°)	81.0	82.0	83.0	84.0	85.0	86.0	87.0	88.0	89.0
0.0	8.08	8.02	8.02	8.08	8.02	8.02	8.02	8.02	8.02
45.0	8.08	8.08	8.02	8.02	8.08	8.02	8.02	8.02	8.02
90.0	8.08	8.08	8.02	8.08	8.08	8.02	8.08	8.02	8.08
135.0	8.08	8.08	8.08	8.08	8.08	8.08	8.08	8.08	8.08
180.0	8.08	8.02	8.02	8.02	8.02	8.02	8.02	8.02	8.02
225.0	8.08	8.02	8.02	8.02	8.02	8.02	8.02	7.96	8.02
270.0	8.08	8.08	8.08	8.08	8.08	8.08	8.02	8.08	8.02
315.0	8.08	8.08	8.08	8.08	8.08	8.02	8.02	8.02	8.02
360.0	8.08	8.02	8.02	8.08	8.02	8.02	8.02	8.02	8.02

NT 2-1563-M 铝反光罩

---

Intensity data(cd)

Appendix Page: 19 Total:19

C/γ(°)	90.0
0.0	8.02
45.0	8.02
90.0	8.02
135.0	8.08
180.0	8.02
225.0	8.02
270.0	8.02
315.0	8.02
360.0	8.02