


Light Source	LUMILEDS 1208
PlasticHolder	92.70.411.00
Metal Adaptor	97.77.073.00
Design Angle	25°±3°
Measured Angle	23.6°
Efficiency	≥95%

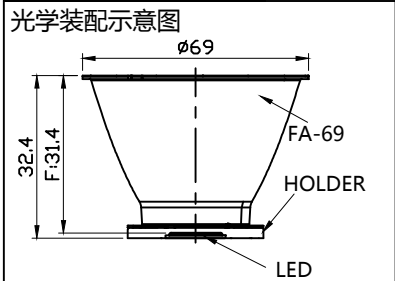

- 技术要求:
1. 材质: T=0.4mm 高反射率铝(镜面)。
 2. 表面处理: 氧化铝+PVD镀银。
 3. "*"标记为重点控制尺寸。单位: mm。
 4. 未注公差按公差表。
 5. 产品未注圆角与拔模斜度按3D。
 6. 产品外观按《N-SIP-QA-04 铝反光杯检验标准》。

				Nata [®]		版本 VERSIONS															
						K0															
				DIMENSION TOLERANCE TABLE (UNLESS OTHERWISE STATED) (UNIT:MM)		产品编码 PRODUCT CODE															
				<table border="1"> <tr> <td>> 0-5</td> <td>> 5-30</td> <td>> 30-90</td> <td>> 90-150</td> <td>150-250</td> <td>250-400</td> <td>400-700</td> </tr> <tr> <td>±0.15</td> <td>±0.2</td> <td>±0.4</td> <td>±0.5</td> <td>±0.8</td> <td>±1.5</td> <td>±2</td> </tr> </table>		> 0-5	> 5-30	> 30-90	> 90-150	150-250	250-400	400-700	±0.15	±0.2	±0.4	±0.5	±0.8	±1.5	±2	91.02.2755.000	
> 0-5	> 5-30	> 30-90	> 90-150	150-250	250-400	400-700															
±0.15	±0.2	±0.4	±0.5	±0.8	±1.5	±2															
				PUNCH TOLERANCE TABLE (UNLESS OTHERWISE STATED) (ANGLE)		产品名称 PRODUCT NAME															
				<table border="1"> <tr> <td>> 0-10</td> <td>> 10-50</td> <td>> 50-120</td> <td>120-250</td> <td>250-360</td> </tr> <tr> <td>±1°</td> <td>±0.5°</td> <td>±0.3°</td> <td>±0.2°</td> <td>±0.166°</td> </tr> </table>		> 0-10	> 10-50	> 50-120	120-250	250-360	±1°	±0.5°	±0.3°	±0.2°	±0.166°	2-2755-L					
> 0-10	> 10-50	> 50-120	120-250	250-360																	
±1°	±0.5°	±0.3°	±0.2°	±0.166°																	
				产品图 PRODUCT DRAWING		客户代号 CUSTOMER ID															
				单位 UNIT		NT															
				mm		客户编号 CUSTOMER CODE															
				SHEET 1 OF 1		AVD69-25° 切合反光杯															
标记 MARK		处数 NO. OF MODIF.		更改内容 MODIFICATIONS		日期 DATE (DD-MM-YYYY)															
设计 DESIGNER		制图 DRAWN BY		审核 CHECKED BY		23-07-2024															
工艺 TECHNICAN		批准 APPROVED BY		签名 SIGNED BY		更改日期 MODIF. DATE															
				比例 SCALE		1:1															
				视角 1st ANGLE PROJECTION																	
				页码 PAGE																	